




Thermoflex™

Warm Edge Spacer

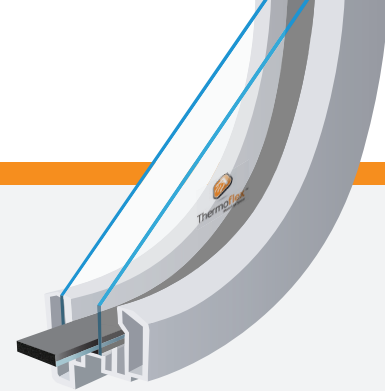

Thermoflex Warm Edge Spacer is Thermoseal Group's own-manufactured foam spacer. It is made with a pre-desiccated Silicone rubber compounded in-house at Thermoseal Group and has a bespoke barrier tape to help reduce moisture penetration into the unit and reduce gas loss throughout the lifetime of the unit.



Black Thermoflex

Flexible Spacer with unique gas barrier tape.
(Standard Reels)

Black	Code	Reels Meterage	Reel length (Ft)
6mm (1/4")	BFL003	460	1509
8mm (5/16")	BFL006	335	1099
10mm	BFL008	305	1000
7/16" (11.1mm)	BFL009	273	895
12mm	BFL011	245	803
1/2" (12.7mm)	BFL012	243	797
14mm	BFL013	215	705
14.5mm	BFL014	230	754
16mm (5/8")	BFL016	205	672
18mm	BFL018	185	606
3/4" (19.1mm)	BFL019	175	574
20mm	BFL020	155	508
22mm	BFL022	145	425
24mm	BFL024	140	459



Black Thermoflex

Flexible Spacer with unique gas barrier tape.
(Small Reels)

Black	Code	Reels Meterage	Reel length (Ft)
6mm (1/4")	BFL3020	40	131
8mm (5/16")	BFL3050	40	131
10mm	BFL3070	40	131
7/16" (11.1mm)	BFL308	20	65.6
12mm	BFL310	20	65.6
1/2" (12.7mm)	BFL311	20	65.6
14mm	BFL312	20	65.6
16mm (5/8")	BFL315	20	65.6
18mm	BFL317	20	65.6
3/4" (19.1mm)	BFL318	20	65.6
20mm	BFL319	20	65.6

Black Thermoflex

Flexible Spacer with unique gas barrier tape.
(Auto Reels)

Black	Code	Reels Meterage	Reel length (Ft)
6mm (1/4")	BFL003AUTO	1380	4527
8mm (5/16")	BFL006AUTO	1005	3297
10mm	BFL008AUTO	915	3001
7/16" (11.1mm)	BFL009AUTO	819	2687
12mm	BFL011AUTO	735	2411
1/2" (12.7mm)	BFL012AUTO	729	2391
14mm	BFL013AUTO	645	2116
16mm (5/8")	BFL016AUTO	615	2017
18mm	BFL018AUTO	555	1820
3/4" (19.1mm)	BFL019AUTO	525	1722
20mm	BFL020AUTO	465	1525



Grey Thermoflex

Flexible Spacer with unique gas barrier tape.
(Standard Reels)

Grey	Code	Reels Meterage	Reel length (Ft)
6mm (1/4")	BFL003G	460	1509
8mm (5/16")	BFL006G	335	1099
9mm (23/64")	BFL007G	320	1050
10mm	BFL008G	305	1000
7/16" (11.1mm)	BFL009G	273	895
12mm	BFL011G	245	803
1/2" (12.7mm)	BFL012G	243	797
14mm	BFL013G	215	705
16mm (5/8")	BFL016G	205	672
18mm	BFL018G	185	606
3/4" (19.1mm)	BFL019G	175	574
20mm	BFL020G	155	508





Grey Thermoflex
Flexible Spacer with unique gas barrier tape.
(Auto Reels)

Grey	Code	Reels Meterage	Reel length (Ft)
6mm (1/4")	BFL003GAUTO	1380	4527
8mm (5/16")	BFL006GAUTO	1005	3297
10mm	BFL008GAUTO	915	3001
7/16" (11.1mm)	BFL009GAUTO	819	2687
12mm	BFL011GAUTO	735	2411
1/2" (12.7mm)	BFL012GAUTO	729	2391
14mm	BFL013GAUTO	645	2116
16mm (5/8")	BFL016GAUTO	615	2017
18mm	BFL018GAUTO	555	1820
3/4" (19.1mm)	BFL019GAUTO	525	1722
20mm	BFL020GAUTO	465	1525




Grey Thermoflex
Flexible Spacer with unique gas barrier tape.
(Small Reels)

Grey	Code	Reels Meterage	Reel length (Ft)
6mm (1/4")	BFL3020G	40	131.2
8mm (5/16")	BFL3050G	40	131.2
10mm	BFL3070G	40	131.2
7/16" (11.1mm)	BFL308G	20	65.6
12mm	BFL310G	20	65.6
1/2" (12.7mm)	BFL311G	20	65.6
14mm	BFL312G	20	65.6
16mm (5/8")	BFL315G	20	65.6
18mm	BFL317G	20	65.6
3/4" (19.1mm)	BFL318G	20	65.6
20mm	BFL319G	20	65.6

Black Thermoflex Dual Seal Spacer


Flexible Spacer with stepped profile for application of PIB.
(Auto Reels - 6.3mm Profile Height)




Black	Code	Reels Meterage	Reel length (Ft)
8mm (5/16")	BFL400	884	2900
3/8" (9.5mm)	BFL406	TBC	TBC
10mm	BFL404	732	2401
7/16" (11.1mm)	BFL407	TBC	TBC
12mm	BFL408	610	2001
1/2" (12.7mm)	BFL410	549	1801
14mm	BFL412	526	1725
16mm (5/8")	BFL416	457	1500
18mm	BFL420	389	1276
3/4" (19.1mm)	BFL421	TBC	TBC
20mm	BFL424	366	1200

Black Thermoflex Dual Seal Spacer

Flexible Spacer with stepped profile for application of PIB.
(Auto Reels - 7.3mm Profile Height)




Black	Code	Reels Meterage	Reel length (Ft)
8mm (5/16")	BFL460	672	2204
3/8" (9.5mm)	BFL462	TBC	TBC
10mm	BFL464	629	2063
7/16" (11.1mm)	BFL466	TBC	TBC
12mm	BFL468	525	1722
1/2" (12.7mm)	BFL470	549	1801
14mm	BFL472	452	1356
16mm (5/8")	BFL476	393	1179
18mm	BFL480	389	1276
3/4" (19.1mm)	BFL482	TBC	TBC
20mm	BFL484	314	1030



Grey Thermoflex Dual Seal Spacer

Flexible Spacer with stepped profile for application of PIB.
(Auto Reels - 6.3mm Profile Height)

Grey	Code	Reels Meterage	Reel length (Ft)
8mm (5/16")	BFL400G	884	2900
3/8" (9.5mm)	BFL406G	TBC	TBC
10mm	BFL404G	732	2401
7/16" (11.1mm)	BFL407G	TBC	TBC
12mm	BFL408G	610	2001
1/2" (12.7mm)	BFL410G	549	1801
14mm	BFL412G	526	1725
16mm (5/8")	BFL416G	457	1500
18mm	BFL420G	389	1276
3/4" (19.1mm)	BFL421G	TBC	TBC
20mm	BFL424G	366	1200



Grey Thermoflex Dual Seal Spacer

Flexible Spacer with stepped profile for application of PIB.
(Auto Reels - 7.3mm Profile Height)

Grey	Code	Reels Meterage	Reel length (Ft)
8mm (5/16")	BFL460G	672	2204
3/8" (9.5mm)	BFL462G	TBC	TBC
10mm	BFL464G	629	2063
7/16" (11.1mm)	BFL466G	TBC	TBC
12mm	BFL468G	525	1722
1/2" (12.7mm)	BFL470G	549	1801
14mm	BFL472G	452	1356
16mm (5/8")	BFL476G	393	1179
18mm	BFL480G	389	1276
3/4" (19.1mm)	BFL482G	TBC	TBC
20mm	BFL484G	314	1030

Thermoflex Test Kit

Helps determine the activity of the desiccant in your Thermoflex spacer.

Includes: Approved Vials (x4); Approved Humidity Indicator Cards (x5); Desiccant Activity Test Log




Desiccant Activity Test	Code
Thermoflex Test Kit	A452
Humidity Indicator Card x 10	B2831

Thermoflex Manual Application Equipment

Thermoflex Shuttle Applicator

Applicator (SHU001) for use in manual application of foam spacer in the production of IG units.



Code
B281



Liner Remover

The liner remover (LS100) is used to efficiently remove the liner tape covering the side adhesive on spacer systems for manual application of Thermoflex.

Code
B2817

Thermoflex Reel Stand

Allows air-tight storage of foam spacer for minimal desiccant moisture exposure.



Code
ST REEL STAND 1



Thermoflex Double Reel Stand

Allows air-tight storage of two standard reels of foam spacer for minimal desiccant moisture exposure.

Code
ST REEL STAND 2

Thermoflex Assembly Board

For use in assembly of IG units to align glass panels with adjustable end stop.



Code
SW6060



Thermoflex Airfloat Table

With foot switch to change from floatation to glass holding.

Code

ST SUPERAIR
THERM

Please order using the product codes and descriptions. If ordering for the first time, please contact: sales@thermosealgroup.com for details of your Area Sales Manager.

For further information on the Thermoflex range see: www.thermoflexwarmedge.com

Access our Downloads here:

